

**CLEAN
POWER**

**DELIVERS CLEAN POWER THANKS
TO THEIR COPPER-WOUND
HEAD WITH LOW 5% THD, TO
KEEP YOUR ELECTRONICS AND
APPLIANCES SAFE.**



POWERED by
HONDA

BRAVE PRO

**5500
WATT**



POWERED by
HONDA

BRAVE PRO

**8000
WATT**

BRPG5500

Voltage	120/240V AC / 12V DC
AC Output	5500 Watt (Surge) / 4500 Watt (Rated)
Max. AC Amperage / AC Cycle	56.5-63.3 Hz
120V 20 Amp Receptacle	8 Each
120/240V 30 Amp Locking Receptacle	1 Each
120V 30 Amp Locking Receptacle	N/A
12V DC Outlet	1 Each
Exhaust Spark Arrestor	Yes
Engine Brand	Honda GX270
Engine Starter	Recoil
Engine Displacement	270 cc
Fuel Tank Capacity	6.5 Gallons
Voltmeter	Yes
Low Oil Shutdown Protection	Yes
Run Time (@ 50% Load)	14.5 Hours
Sound Level (@ 23 ft)	73 dB
EPA and CARB Compliant	Yes
Wheel Kit	Optional (Item # BRPGWK1)
Battery	N/A
Weight	174 lbs
Dimensions (LxWxH)	27" x 21.25" x 22.63"
Consumer Warranty	3 Year Limited
Commercial Warranty	2 Year Limited

BRPG8000


Voltage	120/240V AC / 12V DC
AC Output	8000 Watt (Surge) / 6600 Watt (Rated)
Max. AC Amperage / AC Cycle	56.5-63.3 Hz
120V 20 Amp Receptacle	8 Each
120/240V 30 Amp Locking Receptacle	1 Each
120V 30 Amp Locking Receptacle	1 Each
12V DC Outlet	1 Each
Exhaust Spark Arrestor	Yes
Engine Brand	Honda GX390
Engine Starter	Recoil
Engine Displacement	389 cc
Fuel Tank Capacity	6.5 Gallons
Voltmeter	Yes
Low Oil Shutdown Protection	Yes
Run Time (@ 50% Load)	10 Hours
Sound Level (@ 23 ft)	74.5 dB
EPA and CARB Compliant	Yes
Wheel Kit	Optional (Item # BRPGWK1)
Battery	N/A
Weight	200 lbs
Dimensions (LxWxH)	27" x 21.25" x 22.63"
Consumer Warranty	3 Year Limited
Commercial Warranty	2 Year Limited

GENERATORS

- ❶ **Digital CDI Ignition**
Ignition offers excellent starting and high-power output.
- ❷ **Copper-Wound Head**
Generator head is 100% copper wound. Low 5% THD, making it safe to use with sensitive equipment.
- ❸ **Full Roll Cage**
A full roll cage with anti-rip mounts prevent damage if tipped.
- ❹ **Solid Base**
A solid base prevents grass, dirt and dust from getting into the engine and alternator.

- ❺ **Vibration Isolation**
Vibration isolation mounts with inter-locking anti-rip brackets for optimal support
- ❻ **Optional Wheel Kit**
An optional wheel kit adds convenient portability.
- ❼ **GFCI Outlets & Auto Idle**
Our BRP8000ES boasts of additional commercial grade features: Eight (8) 120V, 20A GFCI outlets and auto idle. (BRPG8000ES model only)

POWERED by
HONDA™

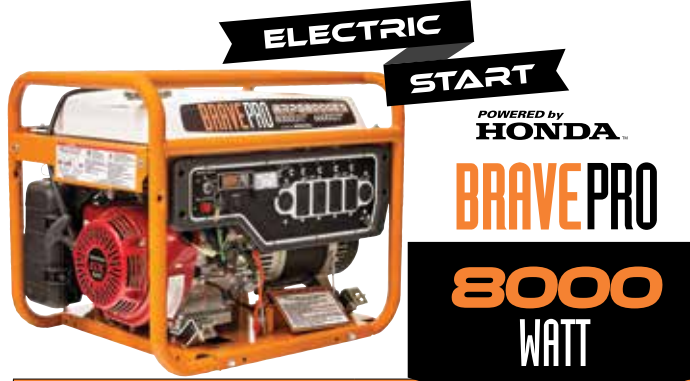

BRPG8000ES	
Voltage	120/240V AC / 12V DC
AC Output	8000 Watt (Surge) / 6600 Watt (Rated)
Max. AC Amperage / AC Cycle	56.5-63.3 Hz
120V 20 Amp Receptacle	8 Each (GFCI)
120/240V 30 Amp Locking Receptacle	1 Each
120V 30 Amp Locking Receptacle	1 Each
12V DC Outlet	1 Each
Exhaust Spark Arrestor	Yes
Engine Brand	Honda GX390
Engine Starter	Electric w/Recoil Backup
Engine Displacement	389 cc
Fuel Tank Capacity	6.5 Gallons
Voltmeter	Yes
Low Oil Shutdown Protection	Yes
Run Time (@ 50% Load)	10 Hours
Sound Level (@ 23 ft)	74.5 dB
EPA and CARB Compliant	Yes
Wheel Kit	Optional (Item # BRPGWK1)
Battery	Not Included
Weight	206 lbs
Dimensions (LxWxH)	27" x 21.25" x 22.63"
Consumer Warranty	3 Year Limited
Commercial Warranty	2 Year Limited



BRPG13000ES	
Voltage	120/240V AC / 12V DC
AC Output	13000 Watt (Surge) / 10500 Watt (Rated)
Max. AC Amperage / AC Cycle	56.5-63.3 Hz
120V 20 Amp Receptacle	8 Each
120/240V 30 Amp Locking Receptacle	1 Each
120/240V 50 Amp Receptacle	1 Each
120V 30 Amp Locking Receptacle	1 Each
12V DC Outlet	N/A
Exhaust Spark Arrestor	Yes
Engine Brand	Honda GX630
Engine Starter	Electric
Engine Displacement	688 cc
Fuel Tank Capacity	11 Gallons
Voltmeter	Yes
Low Oil Shutdown Protection	Yes
Run Time (@ 50% Load)	10 Hours
Sound Level (@ 23 ft)	79 dB
EPA and CARB Compliant	Yes
Wheel Kit	Optional (Item # BRPGWK2)
Battery	Required (Not Included)
Weight	313 lbs
Dimensions (LxWxH)	32.38" x 24.38" x 26.90"
Consumer Warranty	3 Year Limited
Commercial Warranty	2 Year Limited