



**BRAVEPRO**  
POWERED BY  
**HONDA**

**2"**  
**SEMI-TRASH**

**BRP160SP2**

Engine Brand	Honda GX160
Engine Starter	Recoil
Engine Displacement	163 cc
Max. Pump Flow	147 GPM
Max. Pressure	50 PSI
Max. Total Head	115 ft
Max. Suction Lift	28 ft
Port Size	2" x 2" NPT Inlet/Outlet
Solid Particle Capacity	3/8" Diameter
Housing	Aluminum
Impeller/Diffuser	Cast Iron
Basket Strainer	Yes
Hose Adapters	Yes
EPDM Mechanical Seal	Yes
Inlet Valve	Yes
Weight	54 lbs
Dimensions (LxWxH)	20" x 16" x 16"
Consumer Warranty	2 Year Limited
Commercial Warranty	1 Year Limited



**BRAVEPRO**  
POWERED BY  
**HONDA**

**3"**  
**SEMI-TRASH**

**BRP160SP3**

Engine Brand	Honda GX160
Engine Starter	Recoil
Engine Displacement	163 cc
Max. Pump Flow	259 GPM
Max. Pressure	50 PSI
Max. Total Head	100 ft
Max. Suction Lift	28 ft
Port Size	3" x 3" NPT Inlet/Outlet
Solid Particle Capacity	3/8" Diameter
Housing	Aluminum
Impeller/Diffuser	Cast Iron
Basket Strainer	Yes
Hose Adapters	Yes
EPDM Mechanical Seal	Yes
Inlet Valve	Yes
Weight	57 lbs
Dimensions (LxWxH)	20" x 16" x 16"
Consumer Warranty	2 Year Limited
Commercial Warranty	1 Year Limited




**2" PUMP HOSE KIT W/ QUICK CONNECT COUPLERS**  
**ITEM # BRHK2**

Kit includes: 20' Green Suction Hose, 50' Blue PVC Discharge Hose, Two 2" Male Adapter, 2" Plated Steel 3/8" Round Hole Strainer

Fits BRP160SP2 & BRP200TP2

- ① **Fast Flow Rate**  
With flow rates up to 272 GPM, transfer liquids in excess of 16,320 gallons per hour.
- ② **Self Priming**  
Clears passages of air to continue pumping under lift conditions.
- ③ **Aluminum Housing**  
Aluminum housing makes them suitable for applications of flood water removal, lawn and garden watering and pond filling.
- ④ **EPDM Seal & Inlet Valve**  
EPDM mechanical seal and inlet valve for longevity and reliability in most applications
- ⑤ **Full Steel Cage**  
A full steel cage provides added protection to the engine and pump.
- ⑥ **Low Oil Sensor**  
Honda engine includes low-oil sensor to prevent engine seizing when oil level is too low.

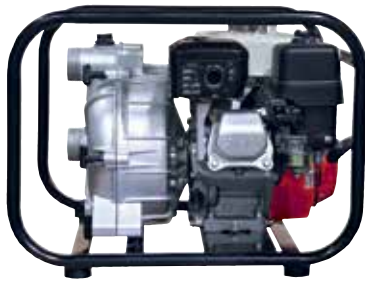

**BRAVEPRO**  
POWERED by  
**HONDA**

**2"**  
**TRASH**

### BRP200TP2

Engine Brand	Honda GX200
Engine Starter	Recoil
Engine Displacement	196 cc
Max. Pump Flow	180 GPM
Max. Pressure	36 PSI
Max. Total Head	85 ft
Max. Suction Lift	26 ft
Port Size	2" x 2" NPT inlet & outlet
Solid Particle Capacity	5/8" Diameter
Housing	Aluminum
Impeller/Diffuser	Cast Iron
Basket Strainer	Yes
Hose Adapters	Yes
EPDM Mechanical Seal	Yes
Inlet Valve	Yes
Weight	69 lbs
Dimensions (LxWxH)	20" x 16" x 16"
Consumer Warranty	2 Year Limited
Commercial Warranty	1 Year Limited



**BRAVEPRO**  
POWERED by  
**HONDA**

**3"**  
**TRASH**

### BRP200TP3

Engine Brand	Honda GX200
Engine Starter	Recoil
Engine Displacement	196 cc
Max. Pump Flow	272 GPM
Max. Pressure	50 PSI
Max. Total Head	115 ft
Max. Suction Lift	28 ft
Port Size	3" x 3" NPT Inlet/Outlet
Solid Particle Capacity	1-1/8" Diameter
Housing	Aluminum
Impeller/Diffuser	Cast Iron
Basket Strainer	Yes
Hose Adapters	Yes
EPDM Mechanical Seal	Yes
Inlet Valve	Yes
Weight	83 lbs
Dimensions (LxWxH)	20" x 16" x 16"
Consumer Warranty	2 Year Limited
Commercial Warranty	1 Year Limited



### 3" PUMP HOSE KIT W/ QUICK CONNECT COUPLERS ITEM # BRHK3

Kit includes: 20' Green Suction Hose, 50' Blue PVC Discharge Hose, Two 3" Male Adapter, 3" Plated Steel 3/8" Round Hole Strainer

Fits BRP160SP3 & BRP200TP3